


LOW VOLTAGE CABLE LINK

Use for Copper Conductor.
Crimp Type for Hexagon and Indent Die.

High Conductivity Copper : 99% I.A.C.S
Copper Purity : 99.9%
Finishing : Tin Plated


Compliant to MS1779 (Malaysian Standard).

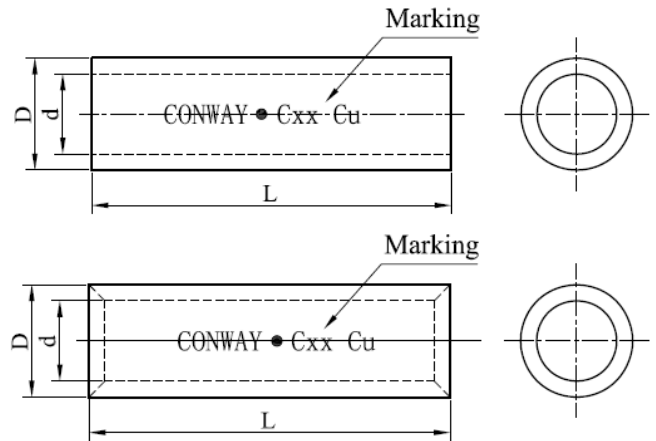

Size	Item Code	L	D	d	Crimping Tool	Hexagon Die A/F	No. Of Crimps
1.5mm ²	CFMS-1.5	18	3.35	1.75	CK-10	Indent	1
2.5mm ²	CFMS-2.5	18	3.9	2.3	CK-10	Indent	1
4mm ²	CFMS-4	19	4.7	3.0	CK-10	Indent	1
6mm ²	CFMS-6	20	5.3	3.6	CK-10	Indent	1
10mm ²	CFMS-10	23	6.3	4.3	CK-10	Indent	1
16mm ²	CFMS-16	30	7.8	5.6	CP-240	6.4	1
25mm ²	CFMS-25	34	9.3	7.0	CP-240	7.7	1
35mm ²	CFMS-35	38	10.8	8.4	CP-240	8.9	1
50mm ²	CFMS-50	40	12.5	9.5	CP-240	10.3	1
70mm ²	CFMS-70	45	14.4	11.2	CP-240	11.9	1
95mm ²	CFMS-95	50	17.5	13.5	CP-240	14.5	1
120mm ²	CFMS-120	54	19.0	14.6	CP-240	15.7	2
150mm ²	CFMS-150	65	21.4	16.4	CP-240	17.6	2
185mm ²	CFMS-185	68	23.7	18.5	CP-240/ CP-630	19.5	2/ 1
240mm ²	CFMS-240	95	27.4	21.0	CP-240/ CP-630	22.6	3/ 2
300mm ²	CFMS-300	100	30.5	23.5	CP-630	25.2	2
400mm ²	CFMS-400	115	34.4	26.7	CP-630	28.5	2
500mm ²	CFMS-500	120	38.6	30.0	CP-630	32.1	3
630mm ²	CFMS-630	130	44.7	34.5	CP-630	37.0	3
800mm ²	CFMS-800	150	50.6	39.0	CP-1000	41.6	3
1000mm ²	CFMS-1000	165	56.2	43.0	CP-1000	46.2	3

Notes:

1. All dimensions are in mm.
2. Other dimensions and customizations are available on request.



CONWAY
Connecting Power

Tel : +6 03 5122 1223
Fax : +6 03 5121 1109

Email : ctm@conway.com.my
Web : www.conway.com.my