

# MEDIUM VOLTAGE CABLE LINK

Use for Copper Conductor.

Crimp Type for Hexagon and Indent Dies.


Corona relief taper end for application up to 36 KV.

High Conductivity Copper : 99% I.A.C.S

Copper Purity : 99.9%

Finishing : Tin Plated


Copper tube compliant to MS1779.

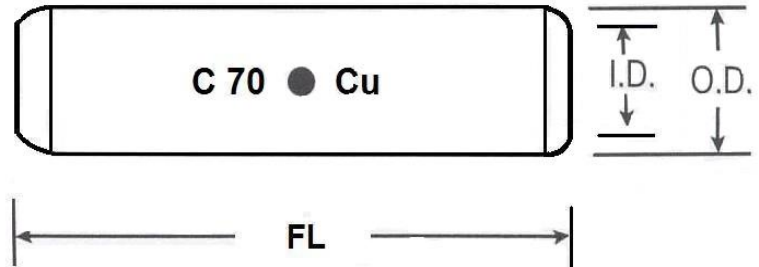

Size	Item Code	L	OD	ID	Crimping Tool	Hexagon Die A/F	No. Of Crimps
50mm <sup>2</sup>	CFMV-50	44	12.5	9.5	TCCP-240	10.3	1
70mm <sup>2</sup>	CFMV-70	49	14.4	11.2	TCCP-240	11.9	1
95mm <sup>2</sup>	CFMV-95	54	17.5	13.5	TCCP-240	14.5	1
120mm <sup>2</sup>	CFMV-120	58	19.0	14.6	TCCP-240	15.7	2
150mm <sup>2</sup>	CFMV-150	68	21.4	16.4	TCCP-240	17.6	2
185mm <sup>2</sup>	CFMV--185	70	23.7	18.5	TCCP-240/ CP-630	19.5	2/ 1
240mm <sup>2</sup>	CFMV-240	100	27.4	21.0	TCCP-240/ CP-630	22.6	3/ 2
300mm <sup>2</sup>	CFMV-300	110	30.5	23.5	TCCP-630	25.2	2
400mm <sup>2</sup>	CFMV-400	120	34.4	26.7	TCCP-630	28.5	2
500mm <sup>2</sup>	CFMV-500	125	38.6	30.0	TCCP-630	32.1	3
630mm <sup>2</sup>	CFMV-630	135	44.7	34.5	TCCP-630	37.0	3
800mm <sup>2</sup>	CFMV-800	160	50.6	39.0	TCCP-800	41.6	3
1000mm <sup>2</sup>	CFMV-1000	170	56.2	43.0	TCCP-1000	46.2	3

## Notes:

- All dimensions are in mm.
- Other dimensions and customizations are available on request.



**CONWAY**  
Connecting Power

Tel : +6 03 5122 1223  
Fax : +6 03 5121 1109

Email : ctm@conway.com.my  
Web : www.conway.com.my